


SUBPLATES

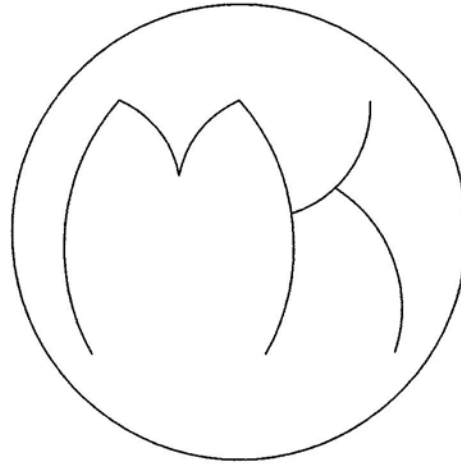

NFPA PATTERN	MED-KAS MODEL CODE	PAGE NO.
D03	BY	4-2,4-3
D05	A	4-4,4-5,4-6
D05-H	JE + KC	4-7,4-8
D06	B	4-9
D07	BE	4-10
D08	CV	4-11,4-12,4-13
D10	D	4-14,4-15
2F06	U	4-16
2F07	X	4-17
C08	E	4-18
C09	F	4-18
R08	Q	4-19
P06	K	4-20
P08	L	4-21
P10	N	4-22

NON NFPA STANDARD SUBPLATES


CPG-6	DE	4-23
CG-06	BL	4-24

MED-KAS HYDRAULICS, INC.
 P.O. BOX 1163 1419 JOHN R
 TROY, MI. 48099 TROY, MI. 48083
 TEL: 248-585-3220 FAX # 248 585-0646
 WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D07 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
BACK PORTED SUBPLATE

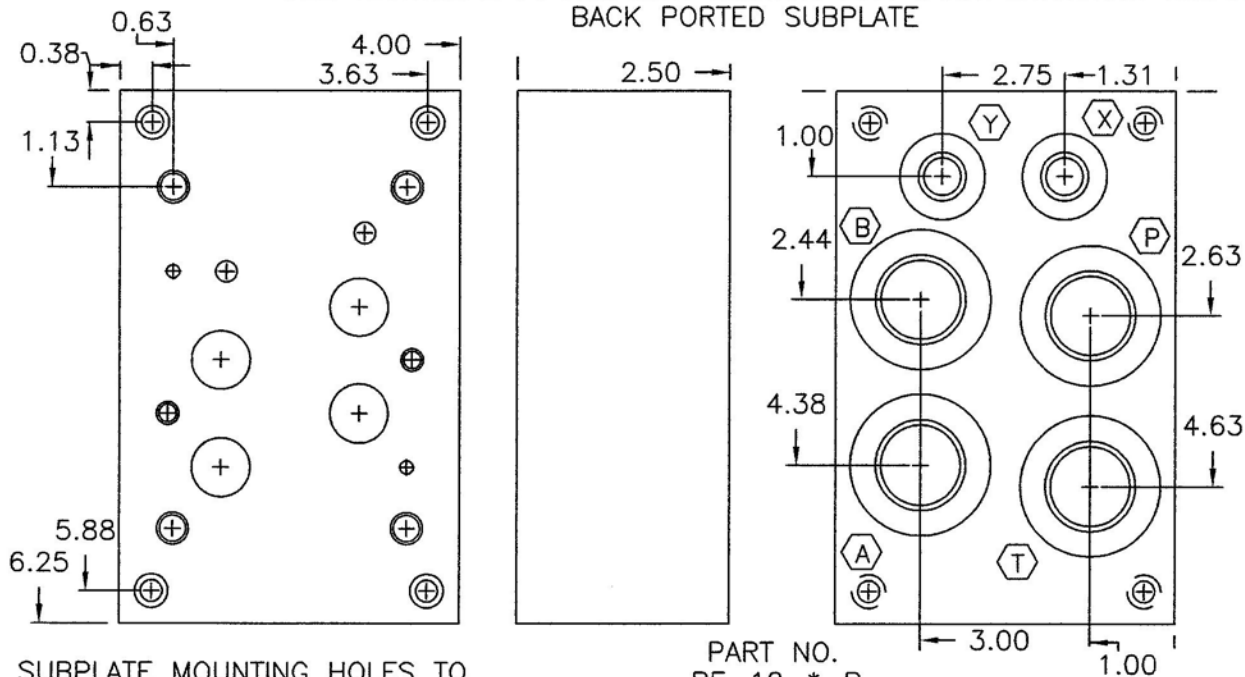

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 5/16-18
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	1.062-12=12T
NPTF	.750-14=12

PORT SIZE

X+Y PORTS
SAE THREAD .562-18
NPTF .250-18

PART NO.


BE-12-*--B

BACK PORTED
(OMIT FOR SIDE PORTED)

PORT TYPE
T=SAE THREAD
OMIT FOR NPTF

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 5/16-18
SOCKET HEAD CAP SCREWS

SIDE PORTED SUBPLATE

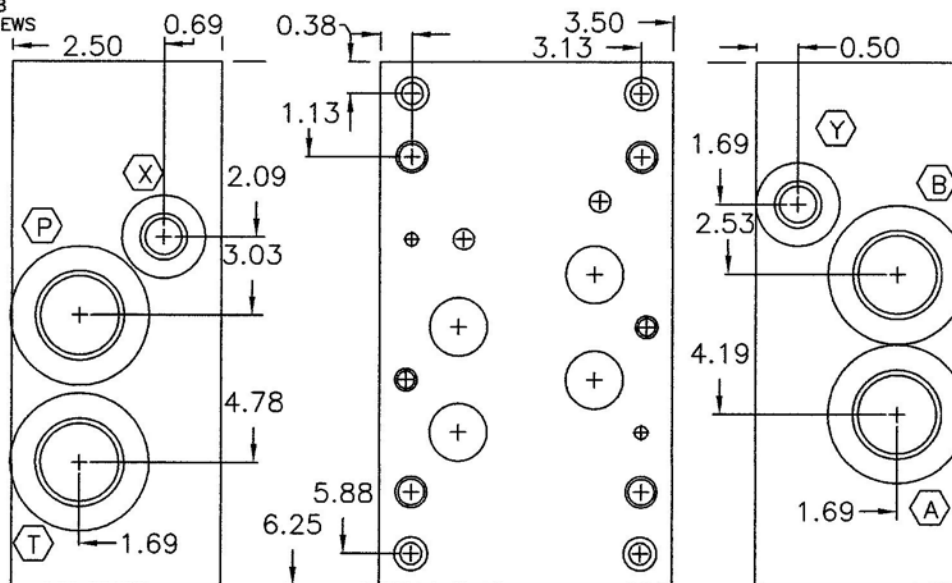

PORT SIZES

SAE THREAD	1.062-12=12T
NPTF	.750-14=12

X+Y PORTS
SAE THREAD .562-18
NPTF .250-18

D07 DESIGNATION

PART NO.

BE-12-*

PORT SIZE

PORT TYPE
T=SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R

TROY, MI. 48083


FAX # 248 585-0646

E-MAIL: info@med-kas.com

D08 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

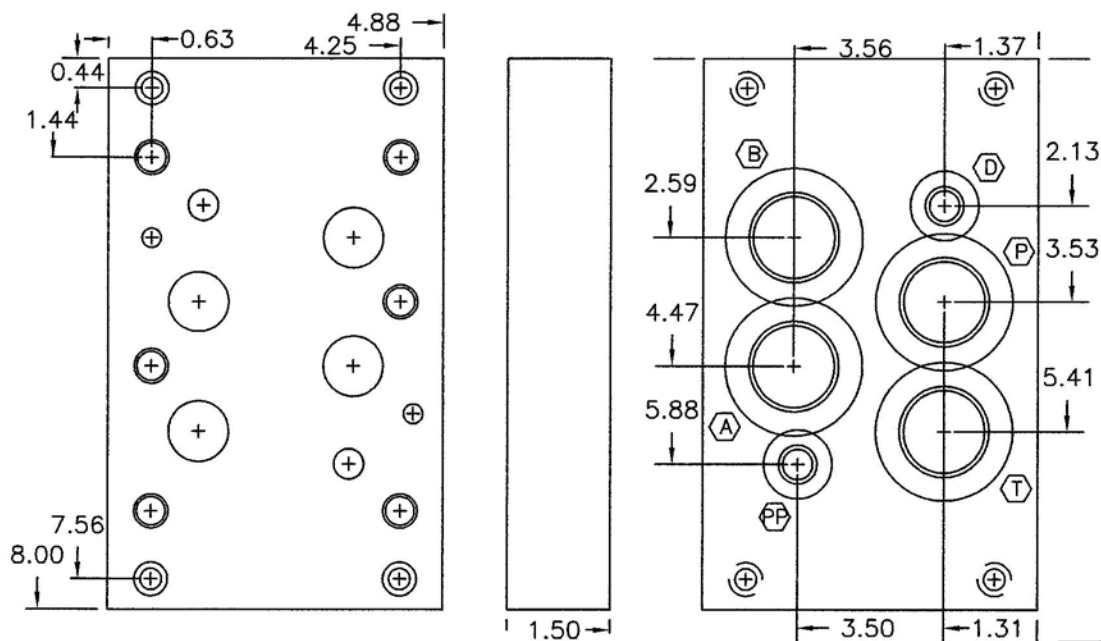

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS D08 DESIGNATION


SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-14=12	1.000-11.5=16

PART NO.
CV-16-*B

BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

X&Y PORTS
SAE THREAD .562-18
NPTF .250-14

SIDE PORTED SUBPLATE

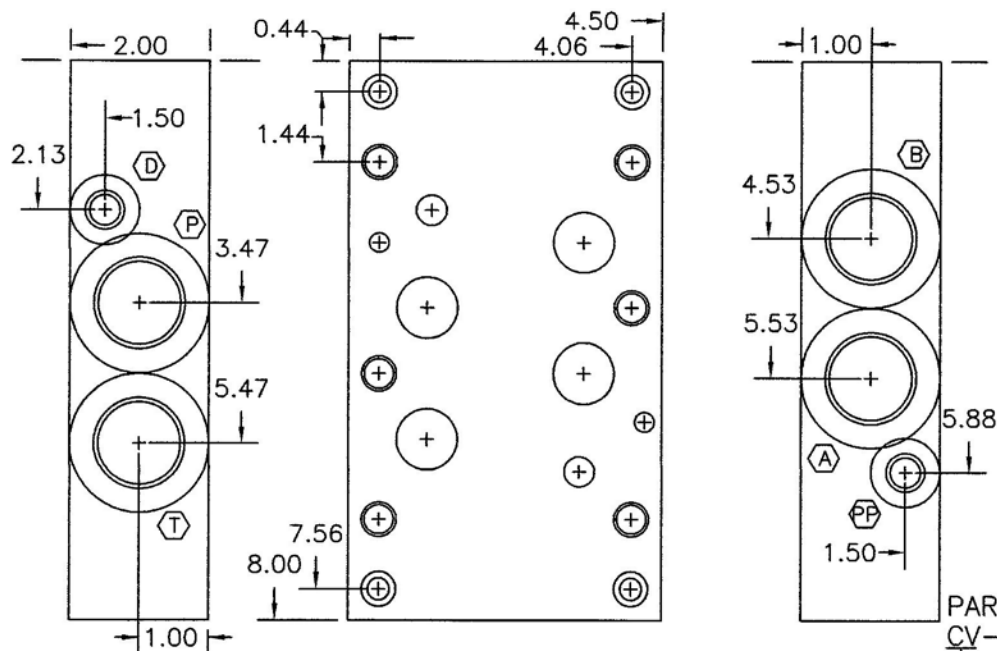

D08 DESIGNATION

SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-14=12	1.000-11.5=16

PART NO.
CV-16-*

PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

X&Y PORTS
SAE THREAD .562-18
NPTF .250-14



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163
TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R

TROY, MI. 48083

FAX # 248 585-0646

E-MAIL: info@med-kas.com


SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D08 SUBPLATE


SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

OVERSIZED REAR PORTED SUBPLATE

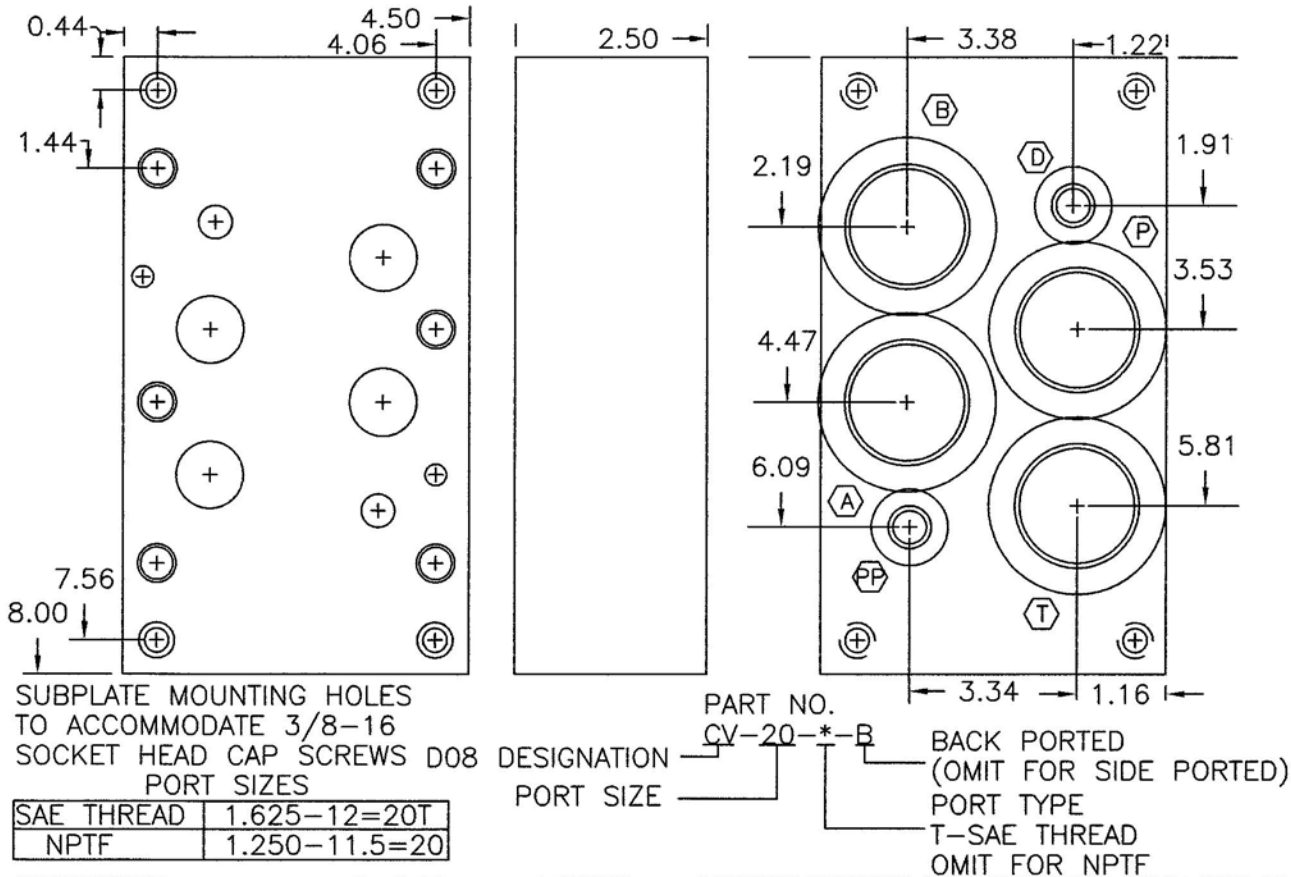

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

OVERSIZED SIDE PORTED SUBPLATE

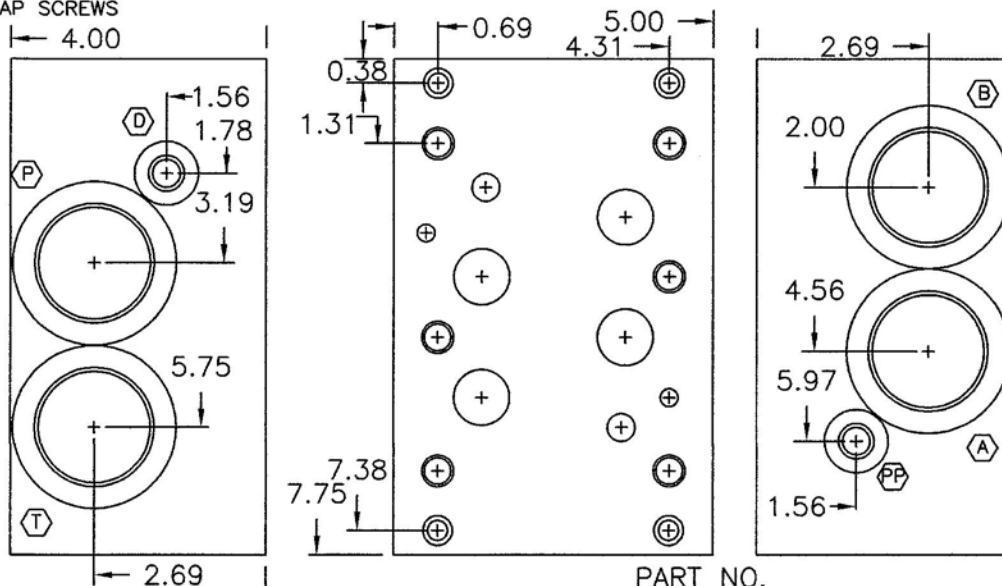

PORT SIZES		***		***	
SAE THREAD	1.625-12=20T	3.50	1.875-12=24T	4.00	4.00
NPTF	1.250-11.5=20	3.50	1.500-11.5=24	4.00	4.00

D08 DESIGNATION
PORT SIZE

PORT TYPE
T-SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R




TROY, MI. 48083

FAX # 248 585-0646

E-MAIL: info@med-kas.com

D08 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
FLANGE CONNECTIONS

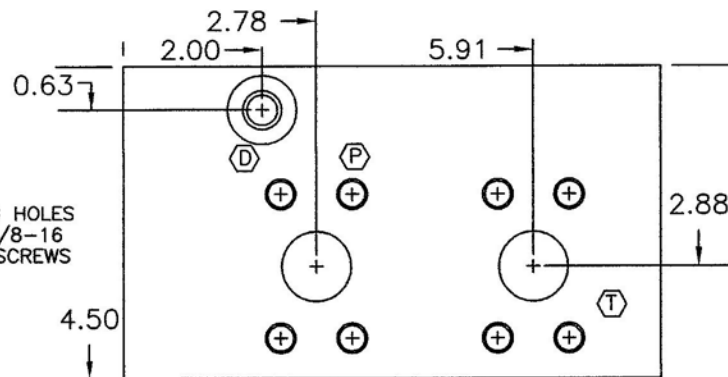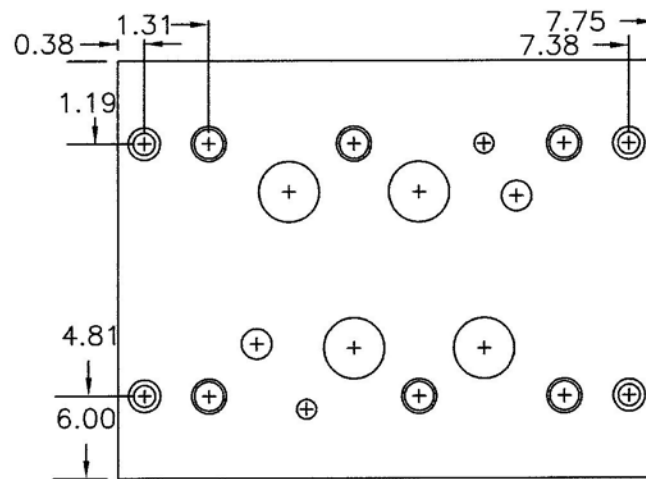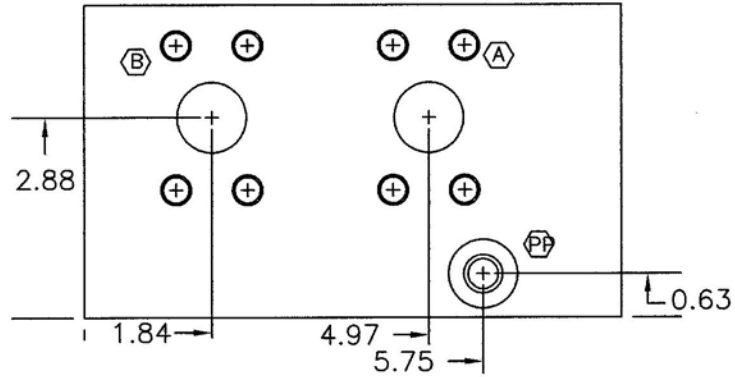

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PART NO.
CV-10-F
D08 DESIGNATION
PORT SIZE
PORT TYPE=FLANGE

PORT SIZES

SAE FLANGES	1.250-3000#
PP+D	.562-18=6T




MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SUBPLATE MATERIAL: 1018

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D10 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
BACK PORTED SUBPLATE

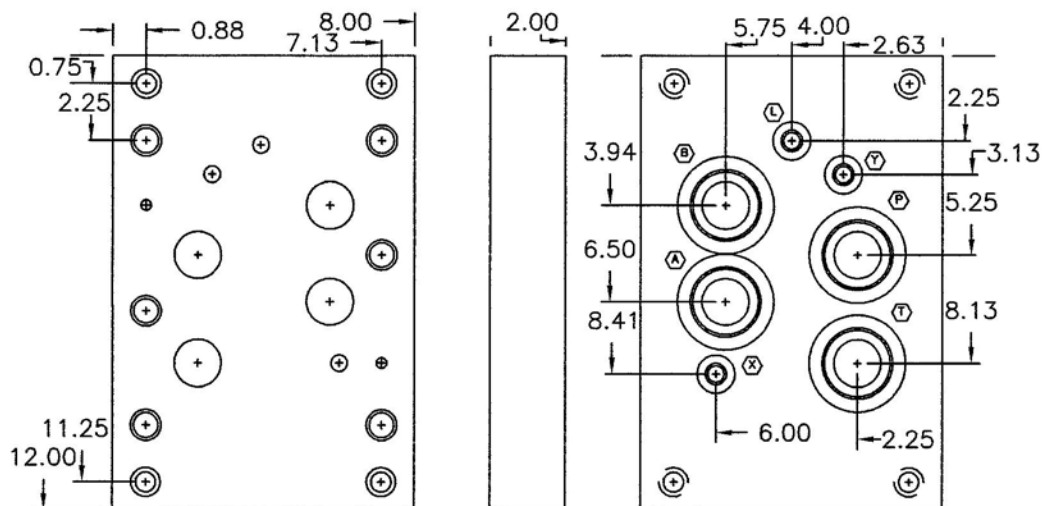


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 5/8-11
SOCKET HEAD CAP SCREWS

PORT SIZES	
SAE THREAD	1.875-12=24T
NPTF	1.500-11.5=24

X,Y,&L PORTS	
SAE THREAD	.750-16
NPTF	.375-18

D10 DESIGNATION **D-24-*** PART NO. **B**
 PORT SIZE BACK PORTED (OMIT FOR SIDE PORTED)
 PORT TYPE
 T=SAE THREAD
 OMIT FOR NPTF

SIDE PORTED SUBPLATE

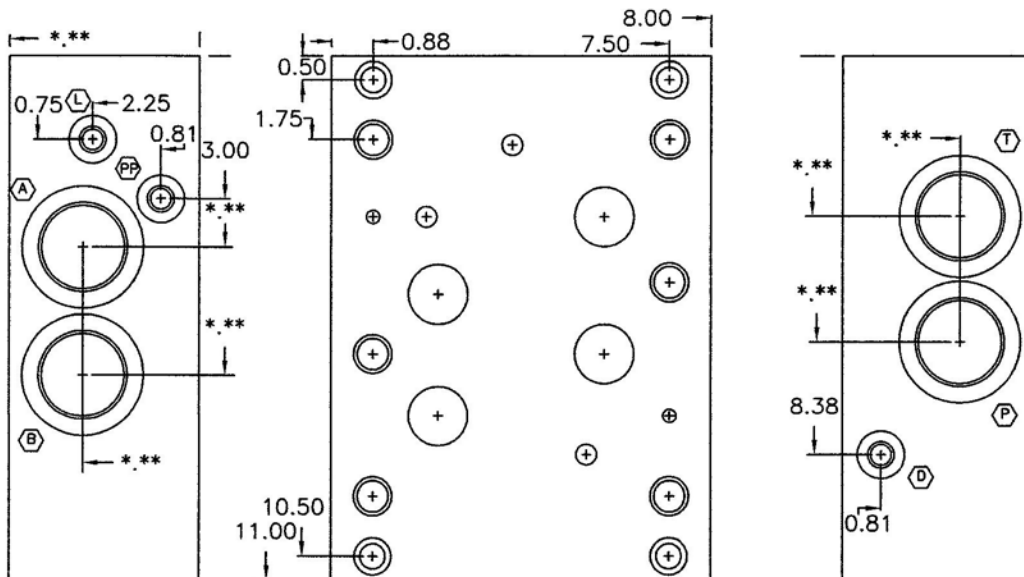

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 5/8-11
SOCKET HEAD CAP SCREWS

X,Y,&L PORTS	
SAE THREAD	.750-16
NPTF	.375-18

D10 DESIGNATION **D-24-*** PART NO. **T**
 PORT SIZE PORT TYPE
 T=SAE THREAD
 OMIT FOR NPTF

*** DIMENSIONS CHANGE
WITH PORT SIZE

PORT SIZES		***	***	***	***	***
SAE THREAD	1.625-12=20T	3.50	1.875-12=24T	4.00	2.50-12=32T	4.50
NPTF	1.250-11.5=20	3.50	1.500-11.5=24	4.00	2.00-11.5=32	4.00



SUBPLATE MATERIAL: 1018

MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R




TROY, MI. 48083

FAX # 248 585-0646

E-MAIL: info@med-kas.com

D10 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
FLANGE CONNECTIONS

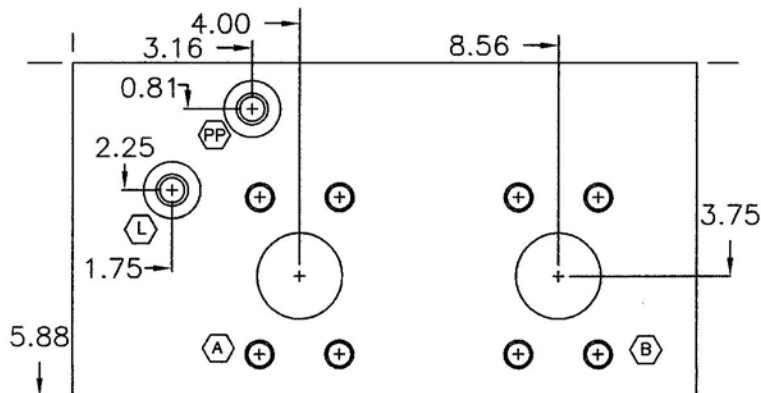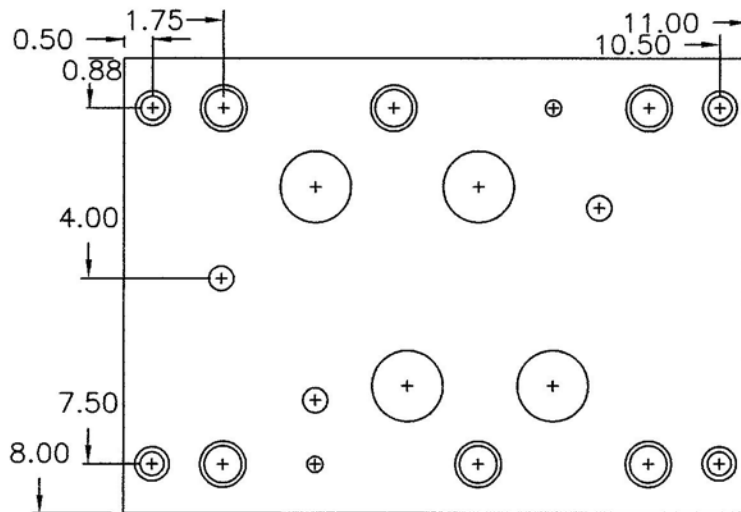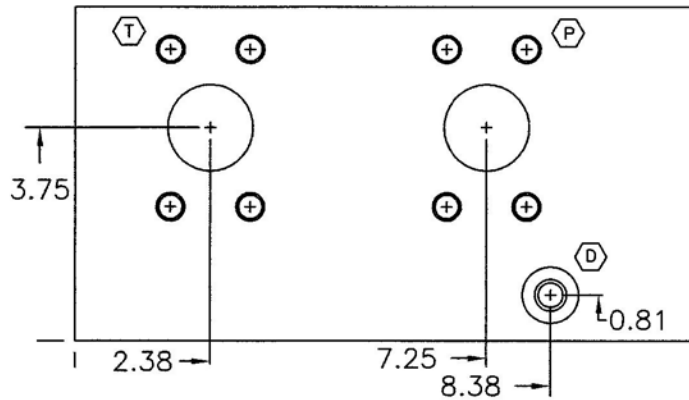

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 1/2-13
SOCKET HEAD CAP SCREWS

PORT SIZES	
SAE FLANGES	2.00-3000#
PP,D+L	.562-18=61

PART NO.
D-16-F
D10 DESIGNATION
PORT SIZE
PORT TYPE=FLANGE




MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

2F06 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

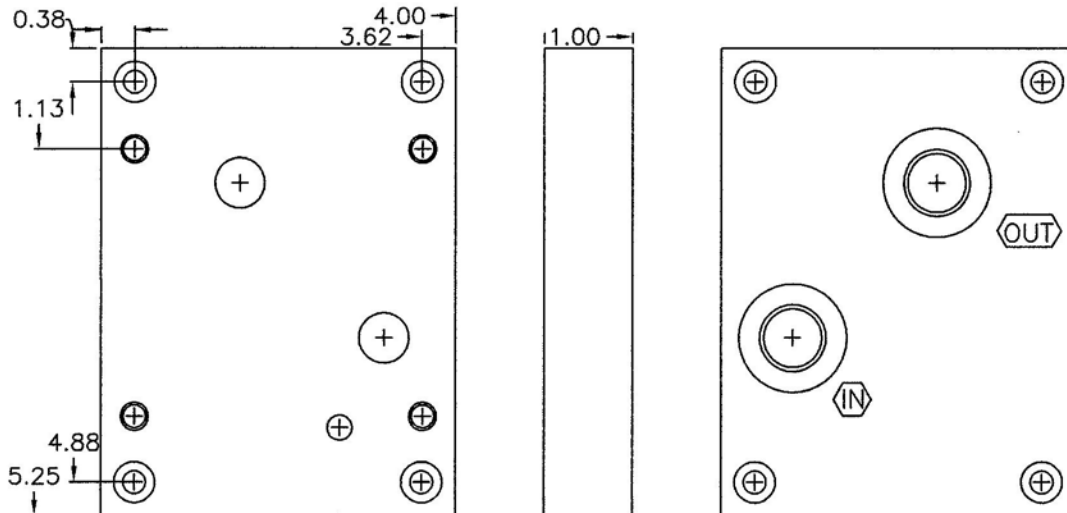


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 5/16-18
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

PART NO.
U-8-*B
2F06 DESIGNATION
PORT SIZE
BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

SIDE PORTED SUBPLATE

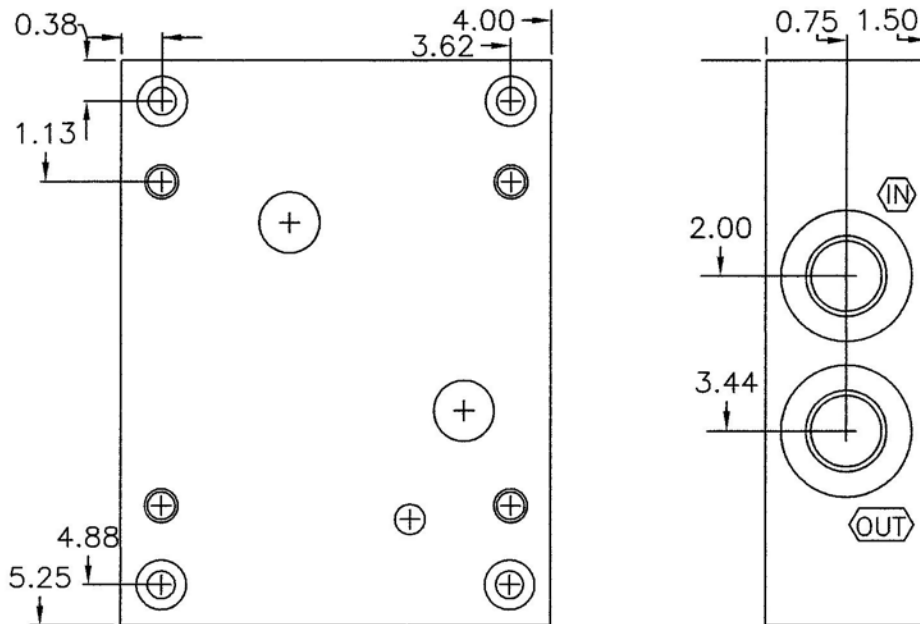

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 5/16-18
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

PART NO.
U-8-*
2F07 DESIGNATION
PORT SIZE
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R

TROY, MI. 48083


FAX # 248 585-0646

E-MAIL: info@med-kas.com


2F07 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

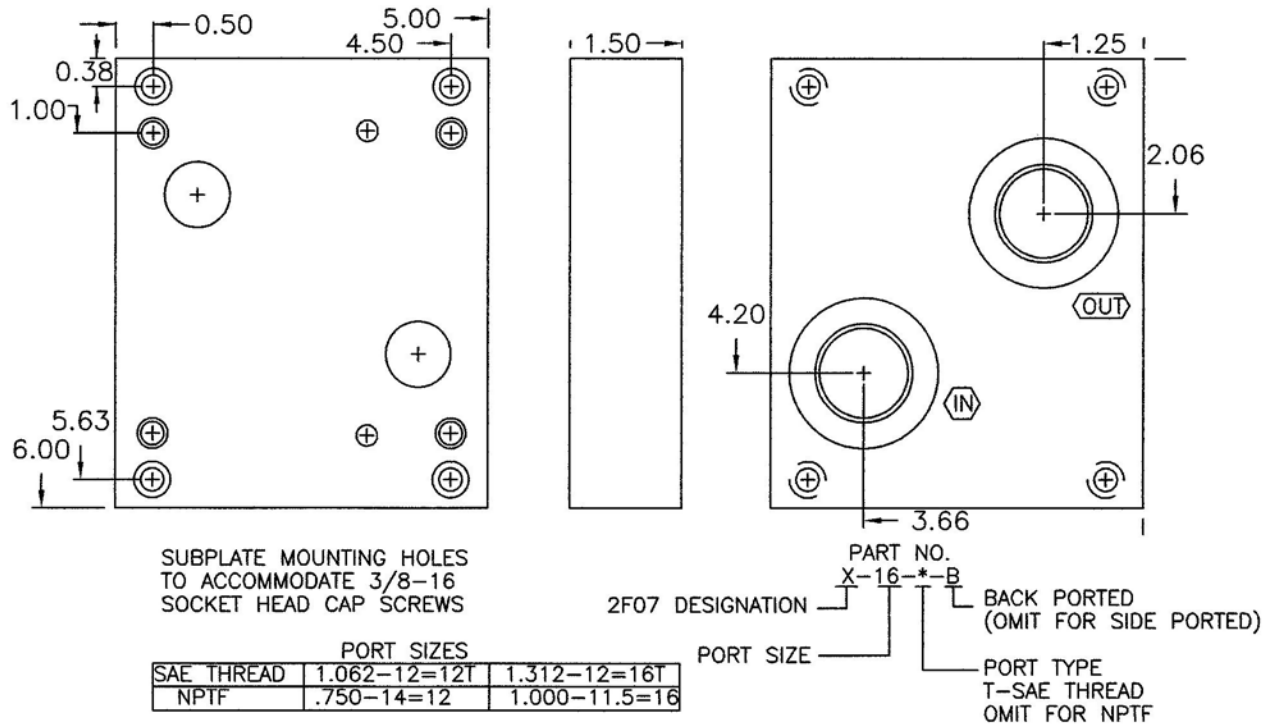

SIDE PORTED SUBPLATE

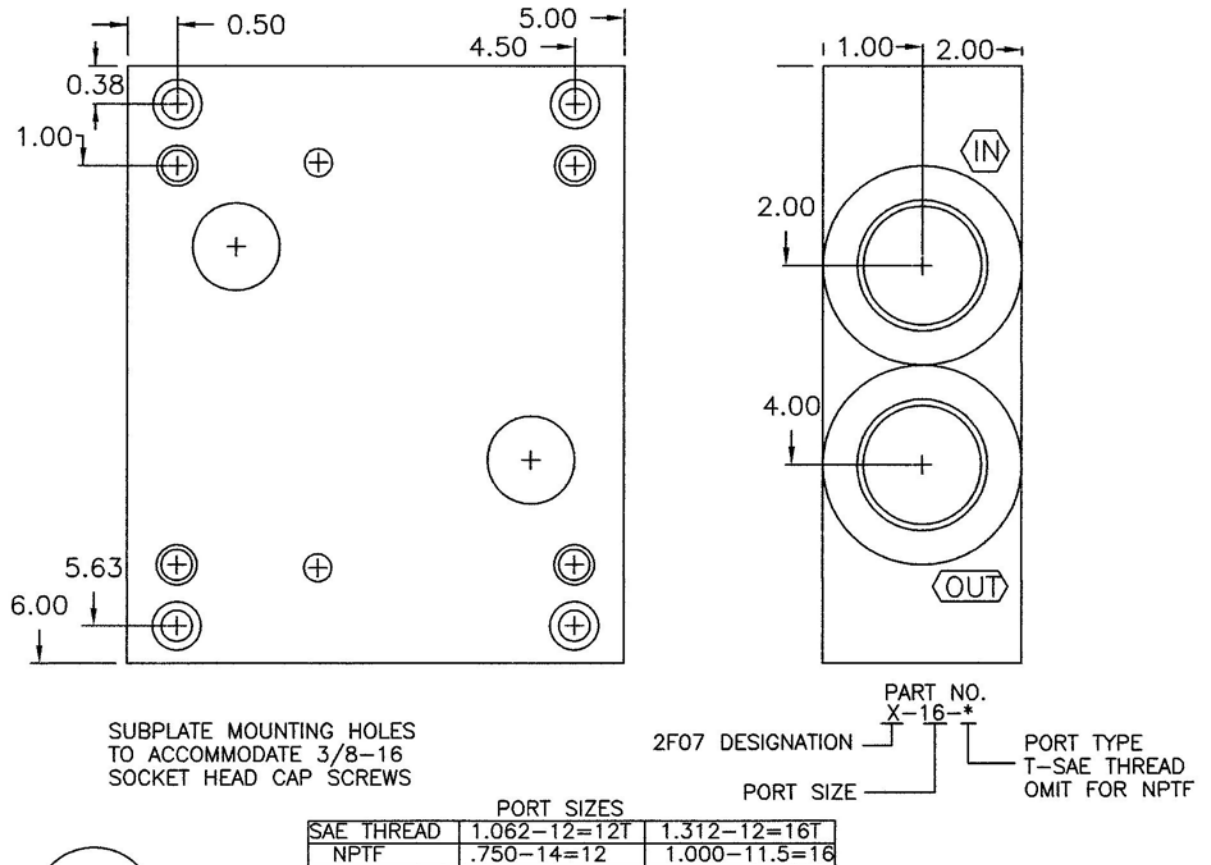


MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

C08 SUBPLATE

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

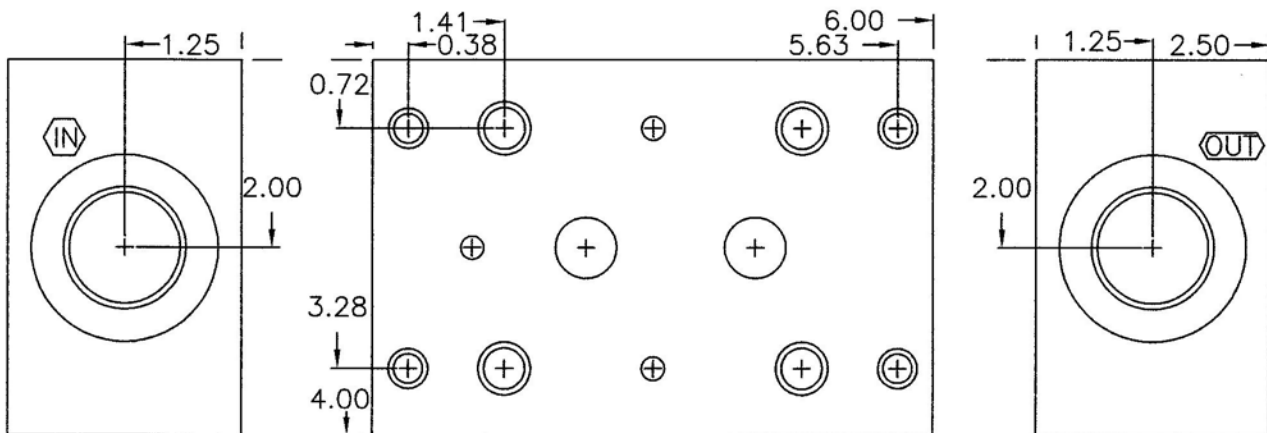


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	1.312-12=16T
NPTF	1.00-11.5=16

PART NO.
E-16-*
C08 DESIGNATION ———
PORT SIZE ———
PORT TYPE
T—SAE THREAD
OMIT FOR NPTF

C09 SUBPLATE

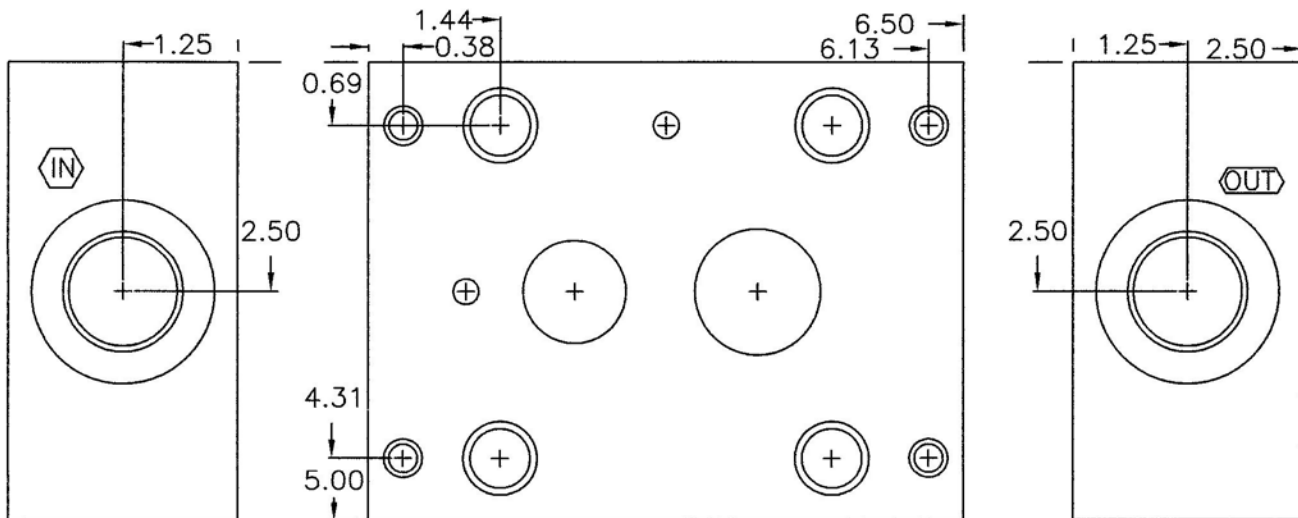

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	1.625-12=20T
NPTF	1.250-11.5=20


PART NO.
F-20-*
C09 DESIGNATION ———
PORT SIZE ———
PORT TYPE
T—SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

R08 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
BACK PORTED SUBPLATE

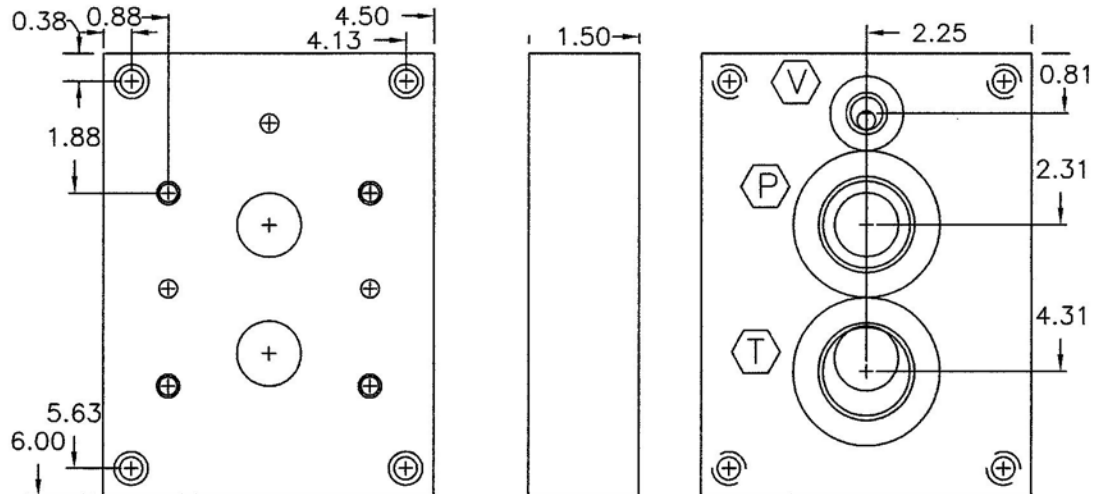


SUBPLATE MOUNTING HOLES
TO ACCOMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PART NO.
Q-16-*
R08 DESIGNATION
PORT SIZE
BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

SIDE PORTED SUBPLATE

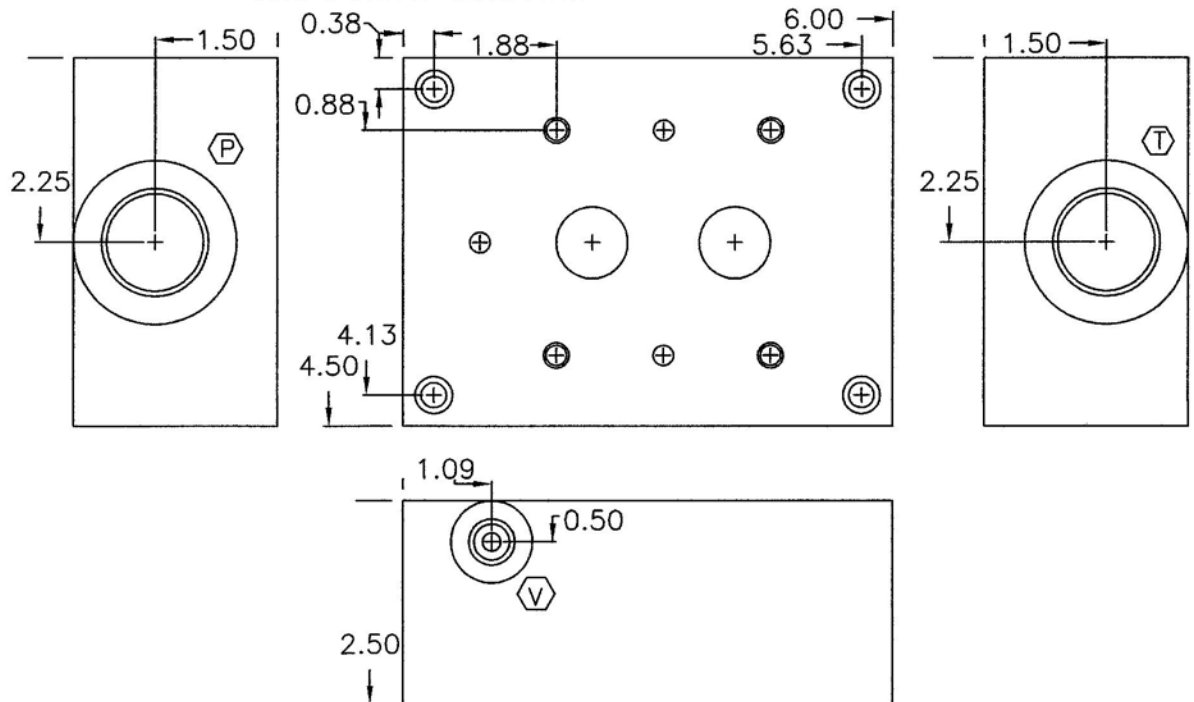

SUBPLATE MOUNTING HOLES
TO ACCOMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PART NO.
Q-16-*
R08 DESIGNATION
PORT SIZE
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16




MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D03 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

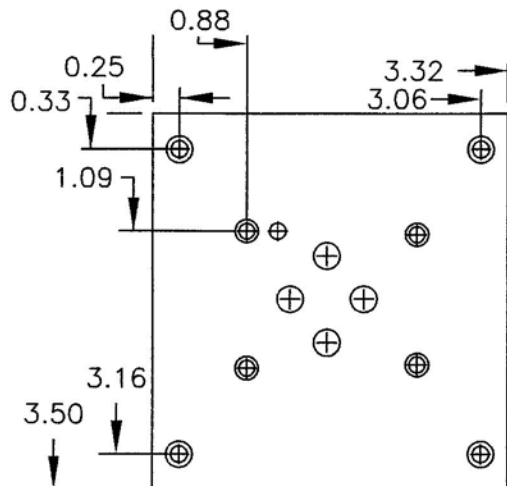

BACK PORTED SUBPLATE

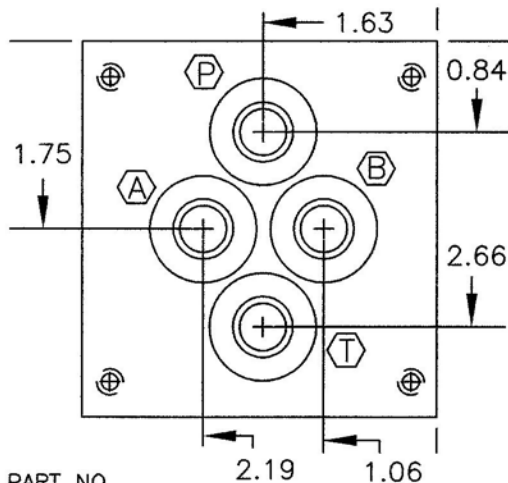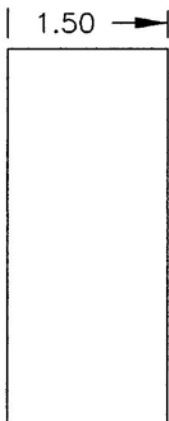

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE #10-24
SOCKET HEAD CAP SCREWS

SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8






D03 DESIGNATION

PART NO.
BY-6-*B

BACK PORTED
(OMIT FOR SIDE PORTED)

PORT TYPE
T - SAE THREAD
OMIT FOR NPTF

SIDE PORTED SUBPLATE

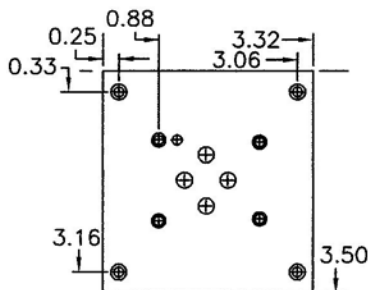

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE #10-24
SOCKET HEAD CAP SCREWS

SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

D03 DESIGNATION

PART NO.
BY-6-*

PORT TYPE
T - SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R


TROY, MI. 48083

FAX # 248 585-0646

E-MAIL: info@med-kas.com

P06 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
BACK PORTED SUBPLATE

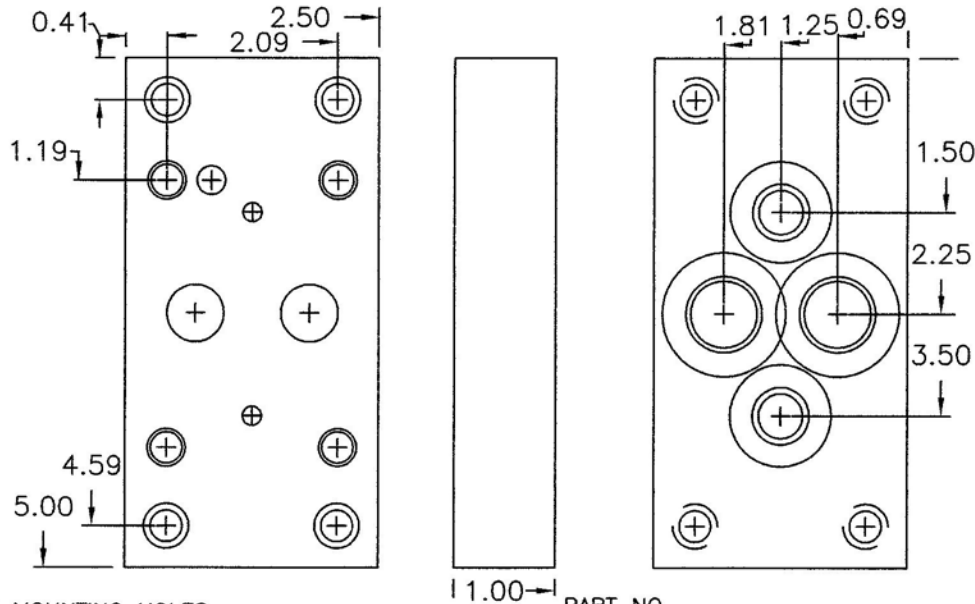

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

P06 DESIGNATION
PORT SIZE

PART NO.


K-8-*

BACK PORTED
(OMIT FOR SIDE PORTED)

PORT TYPE

T-SAE THREAD
OMIT FOR NPTF

SIDE PORTED SUBPLATE

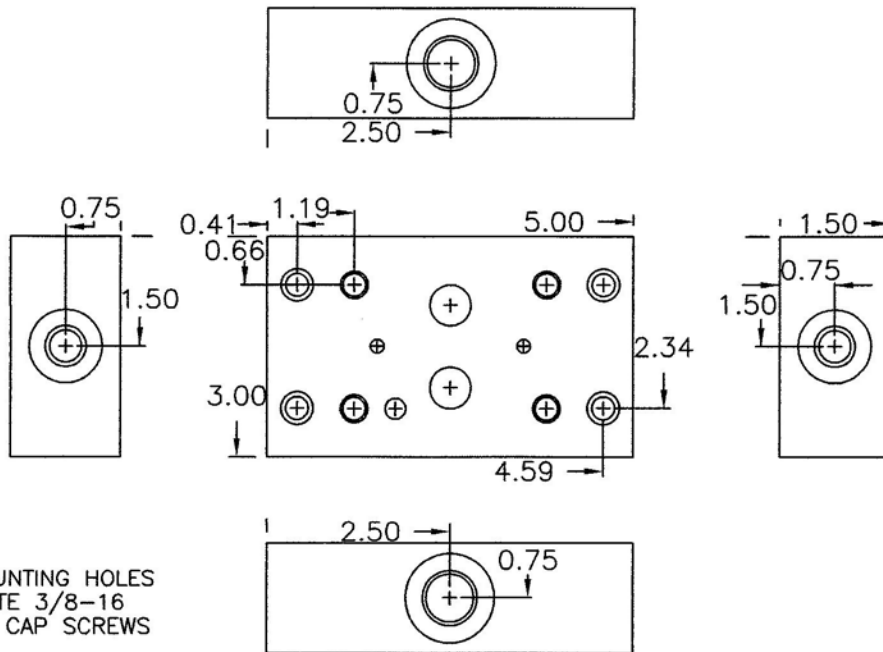

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

P06 DESIGNATION
PORT SIZE

PART NO.

K-8-*

PORT TYPE

T-SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R



TROY, MI. 48083

FAX # 248 585-0646

E-MAIL: info@med-kas.com

P08 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
BACK PORTED SUBPLATE



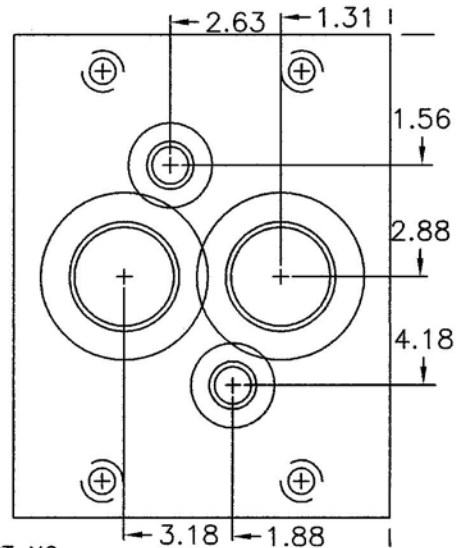
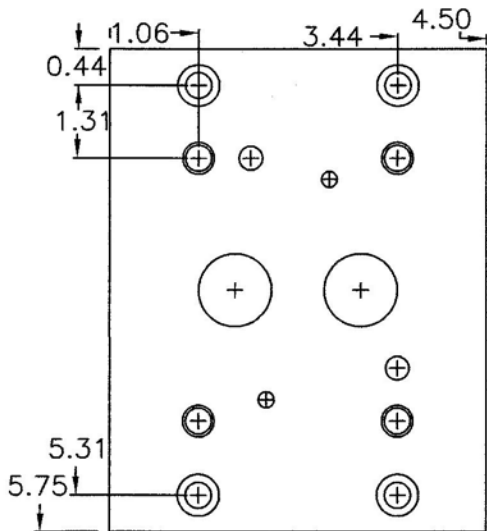


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PART NO. L-16-*
P08 DESIGNATION PORT SIZE
BACK PORTED (OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

SIDE PORTED SUBPLATE

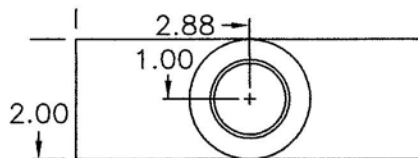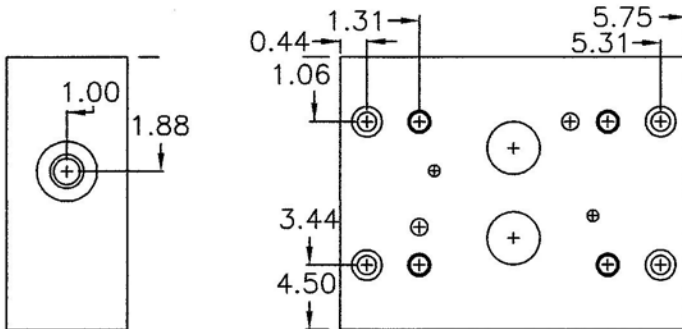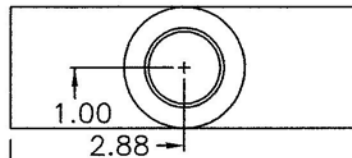

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

PART NO. L-16-*
P08 DESIGNATION PORT SIZE
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF




MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

P10 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

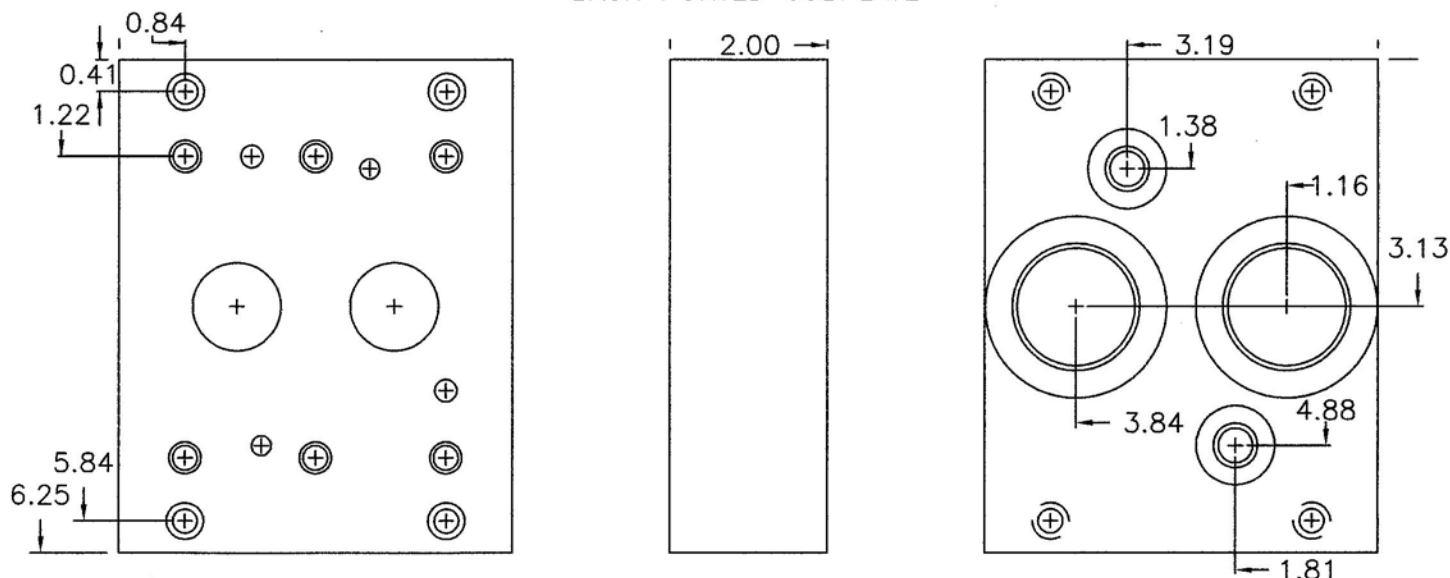


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES		
SAE THREAD	1.312-12=16T	1.625-12=20T
NPTF	1.000-11.5=16	1.250-11.5=20

PART NO.
N-20-*B
P10 DESIGNATION
PORT SIZE
BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T=SAE THREAD
OMIT FOR NPTF

SIDE PORTED SUBPLATE

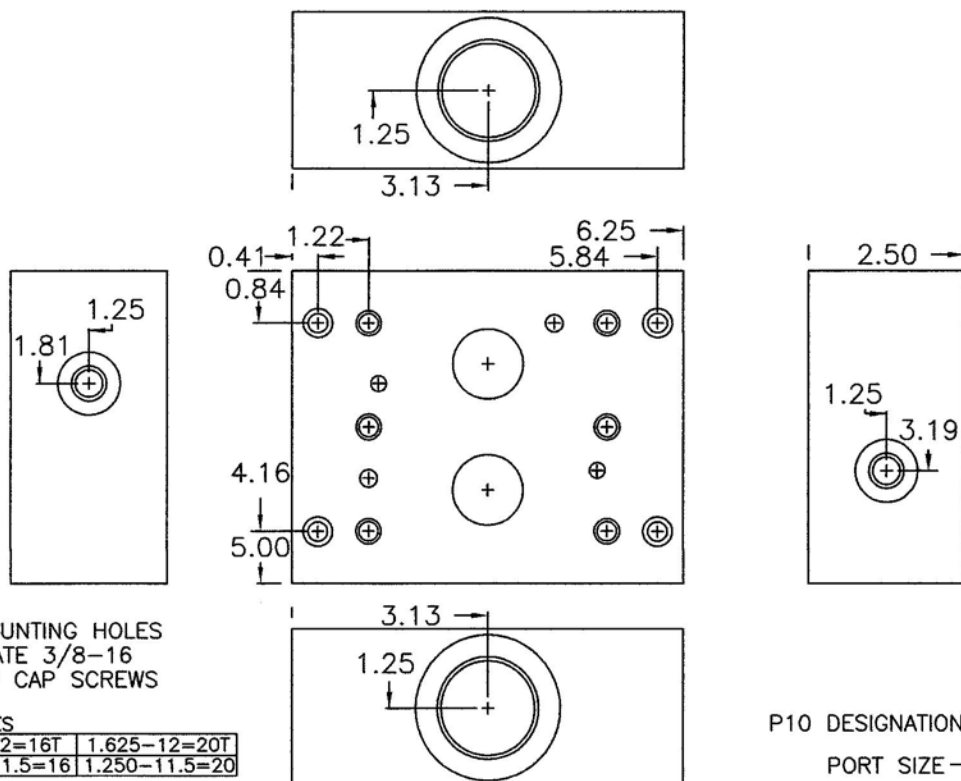

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES		
SAE THREAD	1.312-12=16T	1.625-12=20T
NPTF	1.000-11.5=16	1.250-11.5=20

PART NO.
N-20-*
P10 DESIGNATION
PORT SIZE
PORT TYPE
T=SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R

TROY, MI. 48083


FAX # 248 585-0646

E-MAIL: info@med-kas.com

CPG06 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

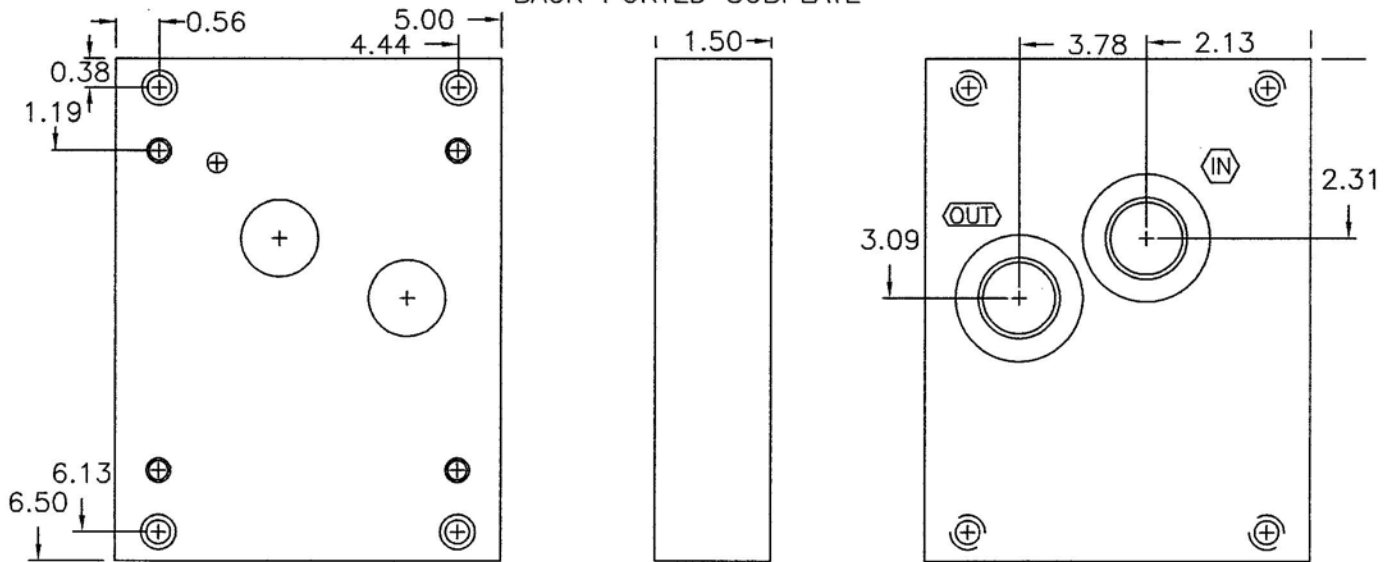


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

PART NO.
DE-12-*
CPG06 DESIGNATION
PORT SIZE
BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T=SAE THREAD
OMIT FOR NPTF

SIDE PORTED SUBPLATE

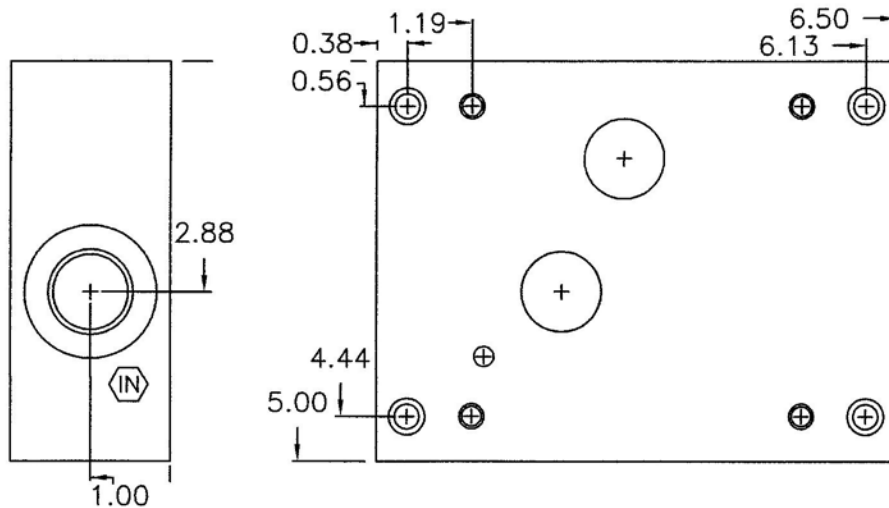

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

PART NO.
DE-12-*
CPG06 DESIGNATION
PORT SIZE
SIDE PORTED
(OMIT FOR BACK PORTED)
PORT TYPE
T=SAE THREAD
OMIT FOR NPTF




MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

CG06 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

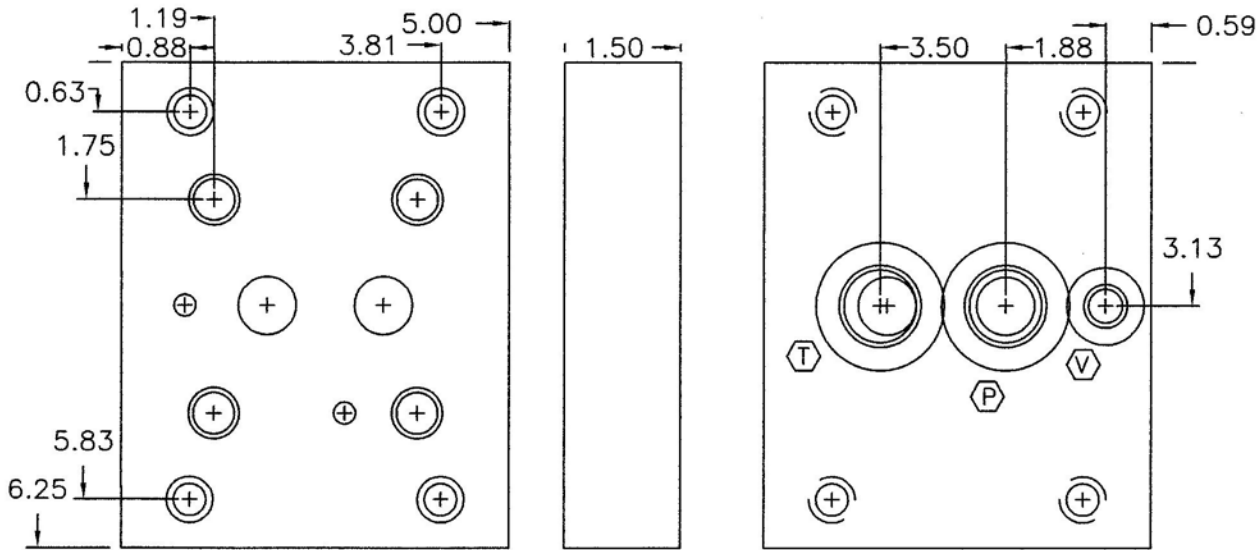


SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 1/2-13
SOCKET HEAD CAP SCREWS


PART NO. BL-12-*
CG06 DESIGNATION
PORT SIZE
BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

SIDE PORTED SUBPLATE

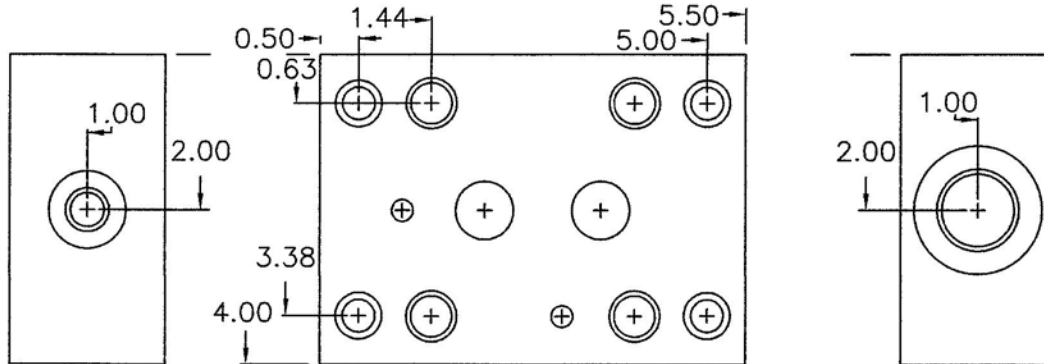

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 1/2-13
SOCKET HEAD CAP SCREWS

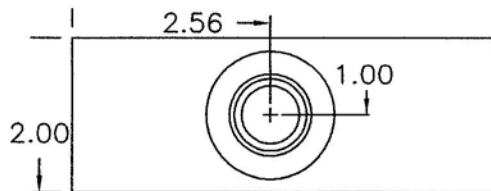

PORT SIZES		
SAE THREAD	1.062-12=12T	1.312-12=16T
NPTF	.750-11.5=12	1.000-11.5=16

PART NO. BL-12-*
CG06 DESIGNATION
PORT SIZE
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R

TROY, MI. 48083


FAX # 248 585-0646

E-MAIL: info@med-kas.com

D03 SUBPLATE

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

OVERSIZED SIDE PORTED ONLY SUBPLATE

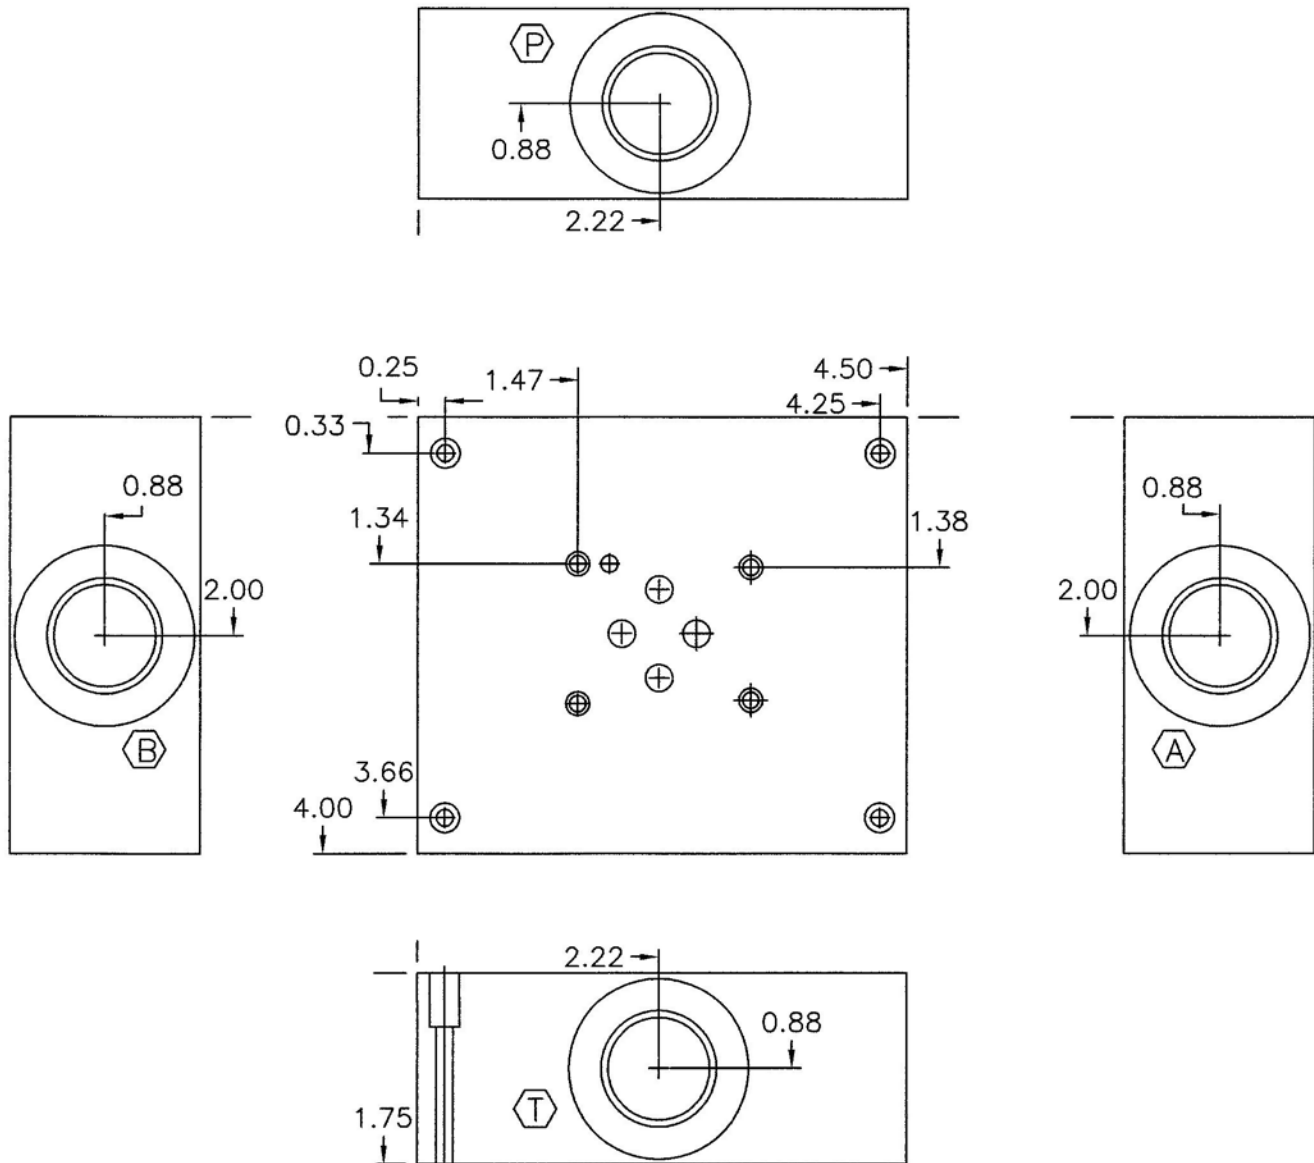

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE #10-24
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	1.062-12 = 12T
NPTF	.750-14 = 12

PART NO.
BY-12-*
D03 DESIGNATION
PORT SIZE
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com


SUBPLATE MATERIAL: 1018

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

D05 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

BACK PORTED SUBPLATE

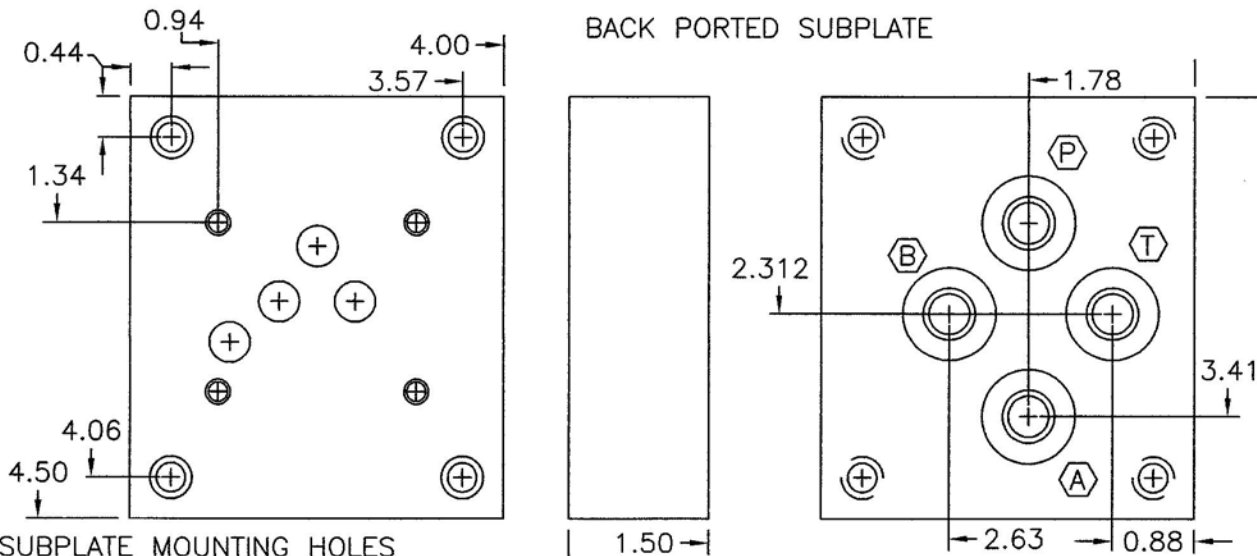

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS


D05 DESIGNATION		
SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

PART NO.

A-6-*B

BACK PORTED
(OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
P-NPTF

SIDE PORTED SUBPLATE

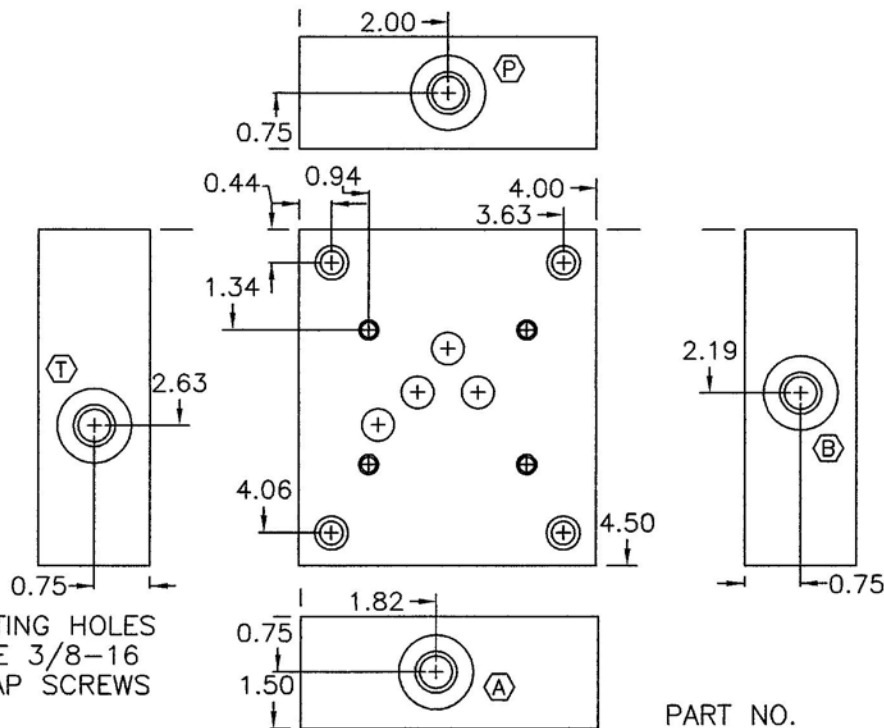

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

D05 DESIGNATION		
SAE THREAD	.562-18=6T	.750-16=8T
NPTF	.375-18=6	.500-14=8

PART NO.

A-6-*

PORT TYPE
T-SAE THREAD
P-NPTF

SUBPLATE MATERIAL: 1018



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163

TROY, MI. 48099

TEL: 248-585-3220

WEB SITE: www.med-kas.com

1419 JOHN R

TROY, MI. 48083


FAX # 248 585-0646

E-MAIL: info@med-kas.com

D05 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS


OVERSIZED REAR PORTED SUBPLATE

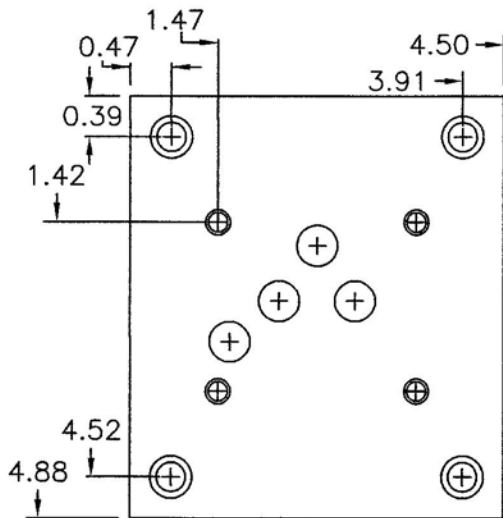

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS


PORT SIZES

SAE THREAD	1.062-12=12T
NPTF	.750-14=12

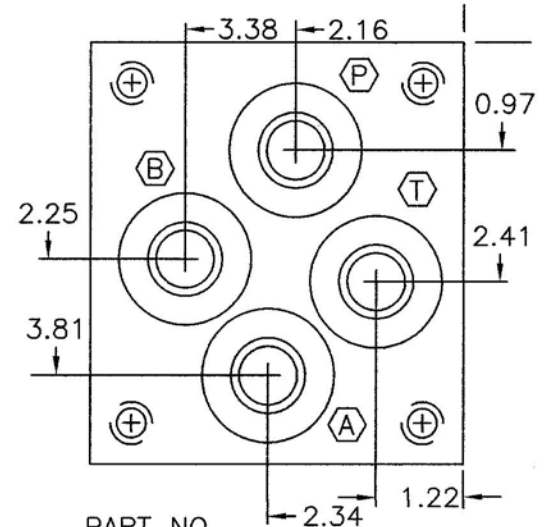

PART NO. A-12-*
D05 DESIGNATION A-12-*
PORT SIZE *
BACK PORTED (OMIT FOR SIDE PORTED)
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF

OVERSIZED SIDE PORTED SUBPLATE

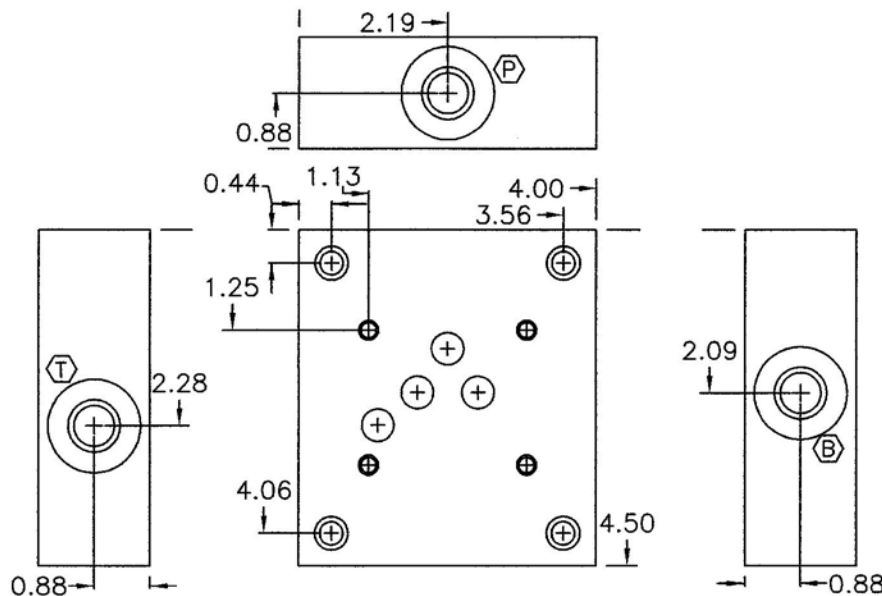

SUBPLATE MOUNTING HOLES
TO ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	1.062-12=12T
NPTF	0.75-14=12

PART NO. A-12-*
D05 DESIGNATION A-12-*
PORT SIZE *
PORT TYPE
T-SAE THREAD
OMIT FOR NPTF








MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

D05 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

FLANGE CONNECTIONS

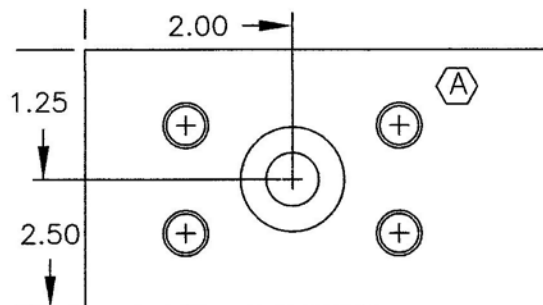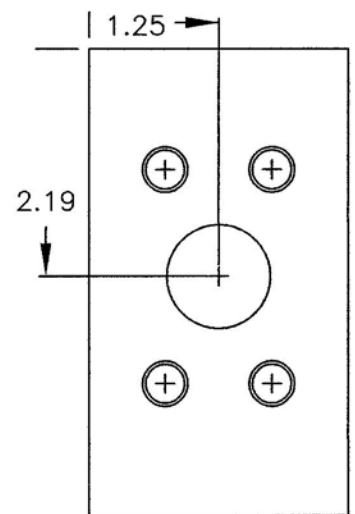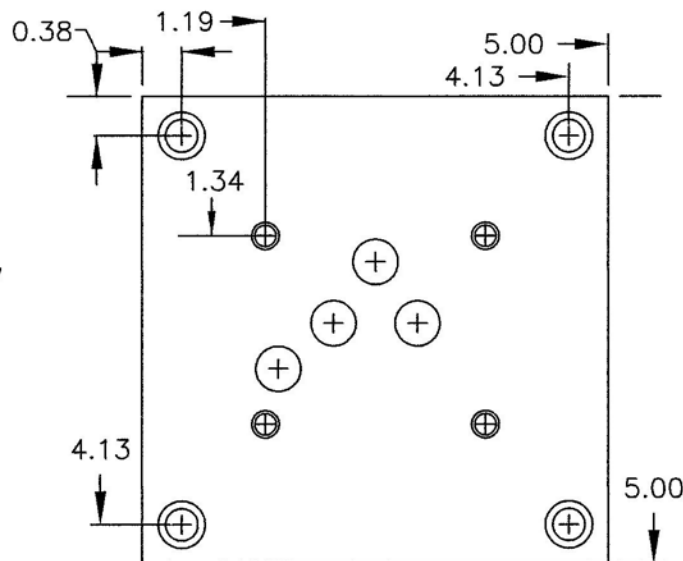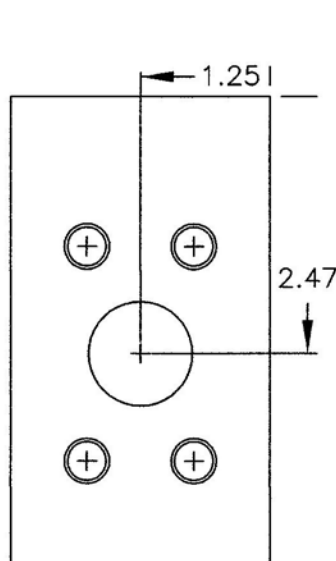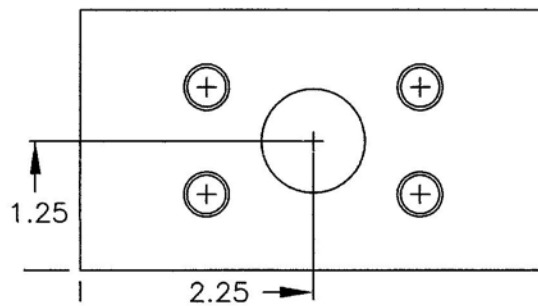

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE FLANGES .750-3000#


PART NO. A-6-E
D05 DESIGNATION
PORT SIZE
PORT TYPE F-FLANGE



MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

D05H SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS
SIDE PORTED SUBPLATE

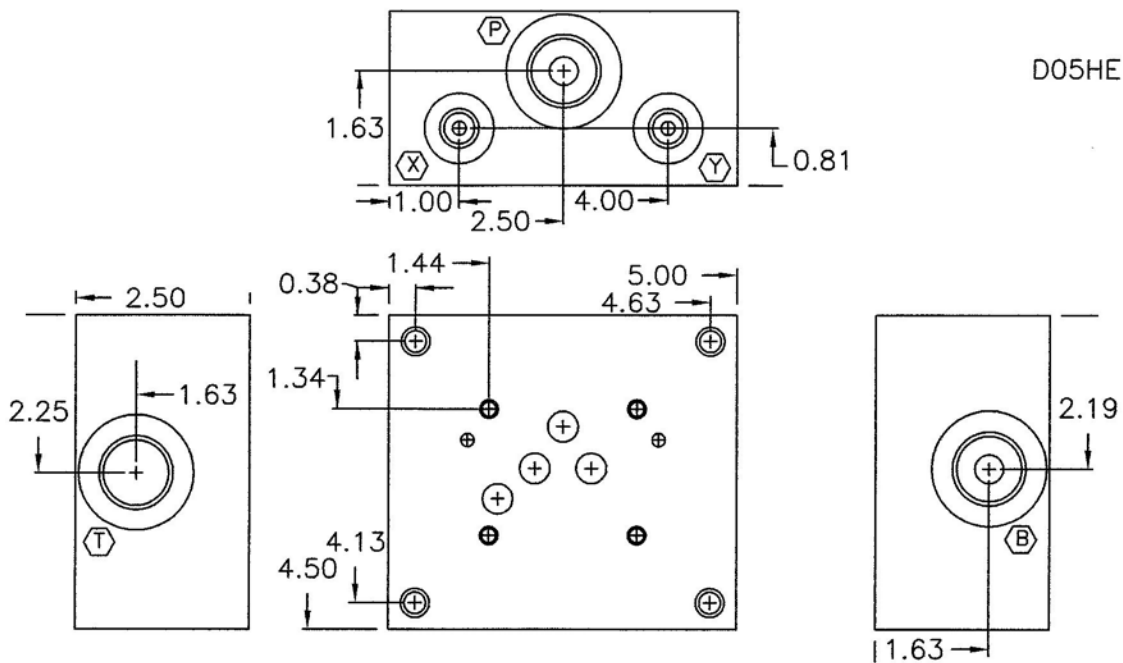


SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

P,T,A,B	1.062-12=12T
X+Y	.562-18=6T

D05H DESIGNATION
PART NO. CC-12-T
PORT SIZE
PORT TYPE T-SAE THREAD

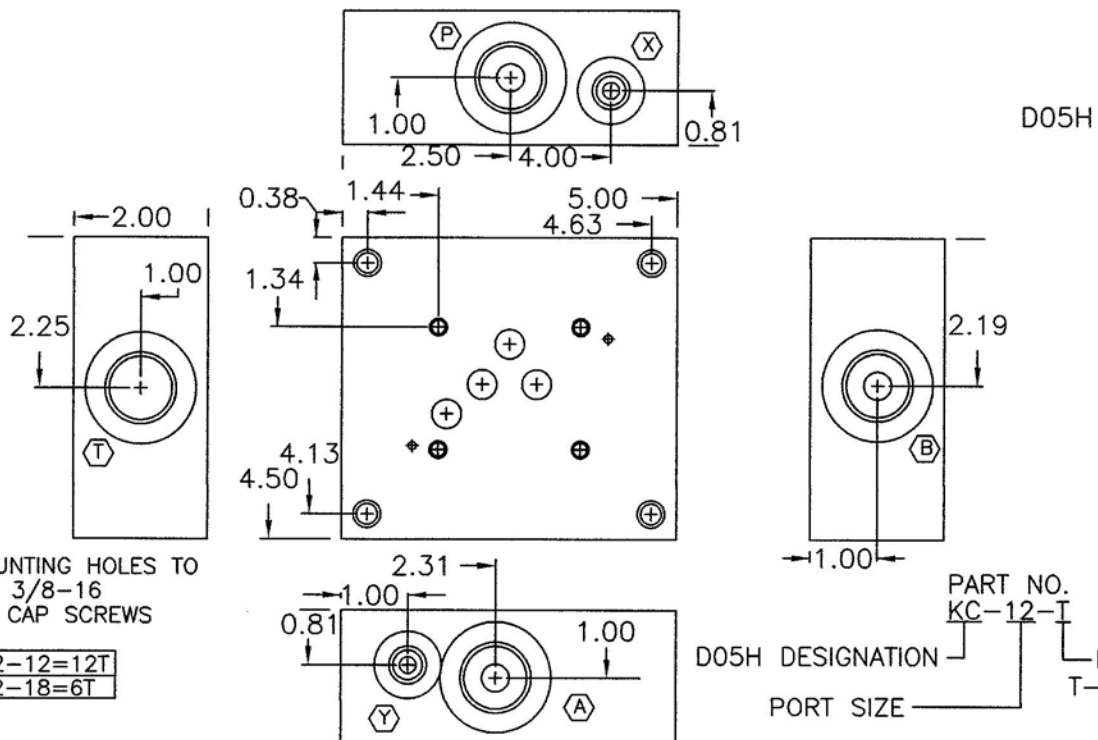

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

P,T,A,B	1.062-12=12T
X+Y	.562-18=6T

D05H DESIGNATION
PART NO. KC-12-T
PORT SIZE
PORT TYPE T-SAE THREAD



MED-KAS HYDRAULICS, INC.

P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083

TEL: 248-585-3220 FAX # 248 585-0646

E-MAIL: info@med-kas.com

SUBPLATE MATERIAL: 1018



WEB SITE: www.med-kas.com

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


D05H SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

SIDE PORTED SUBPLATE

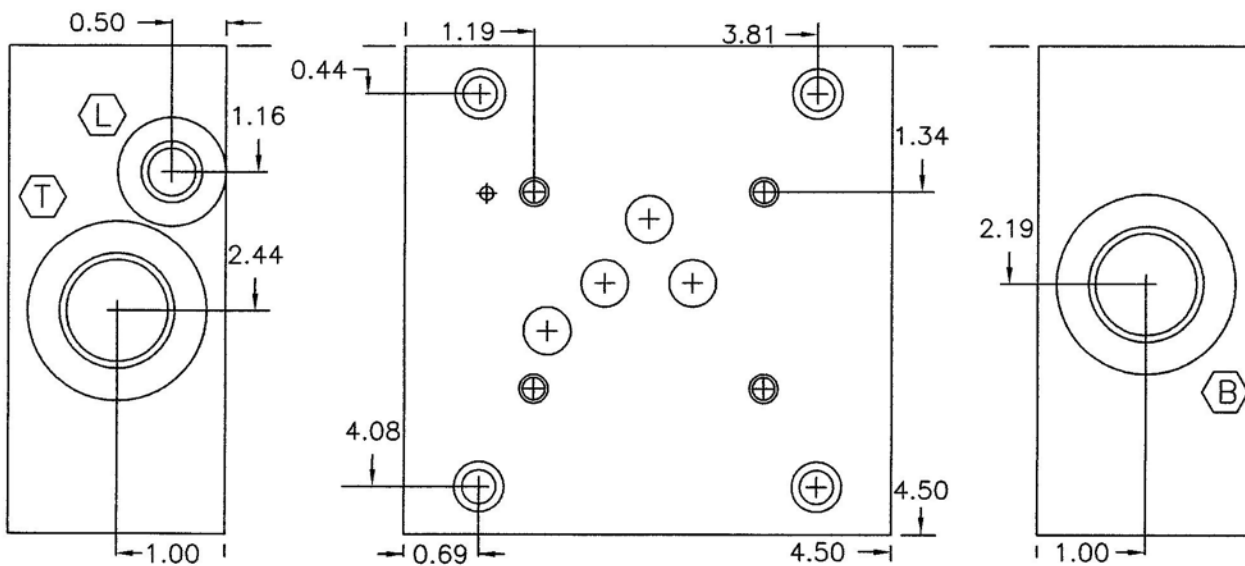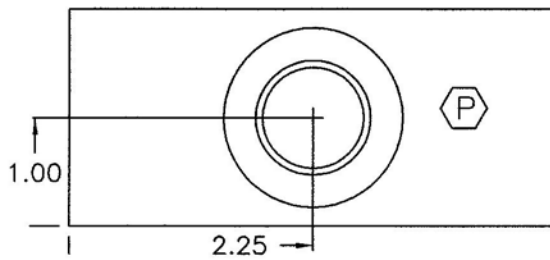

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

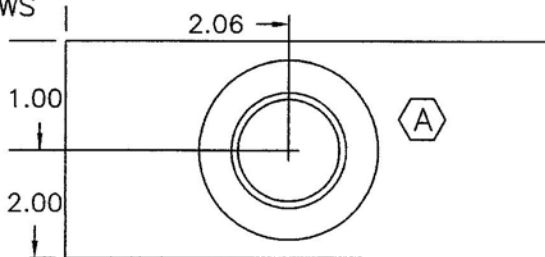

PORT SIZES

P,T,A,B	1.062-12=12T
"L"	.562-18=6T

PART NO. JE-12-T
D05H DESIGNATION
PORT SIZE
PORT TYPE T-SAE THREAD




MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R SUBPLATE MATERIAL: 1018
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

D06 SUBPLATES

SEE TECHNICAL INFORMATION SECTION FOR VALVE MOUNTING DIMENSIONS

SIDE PORTED SUBPLATE

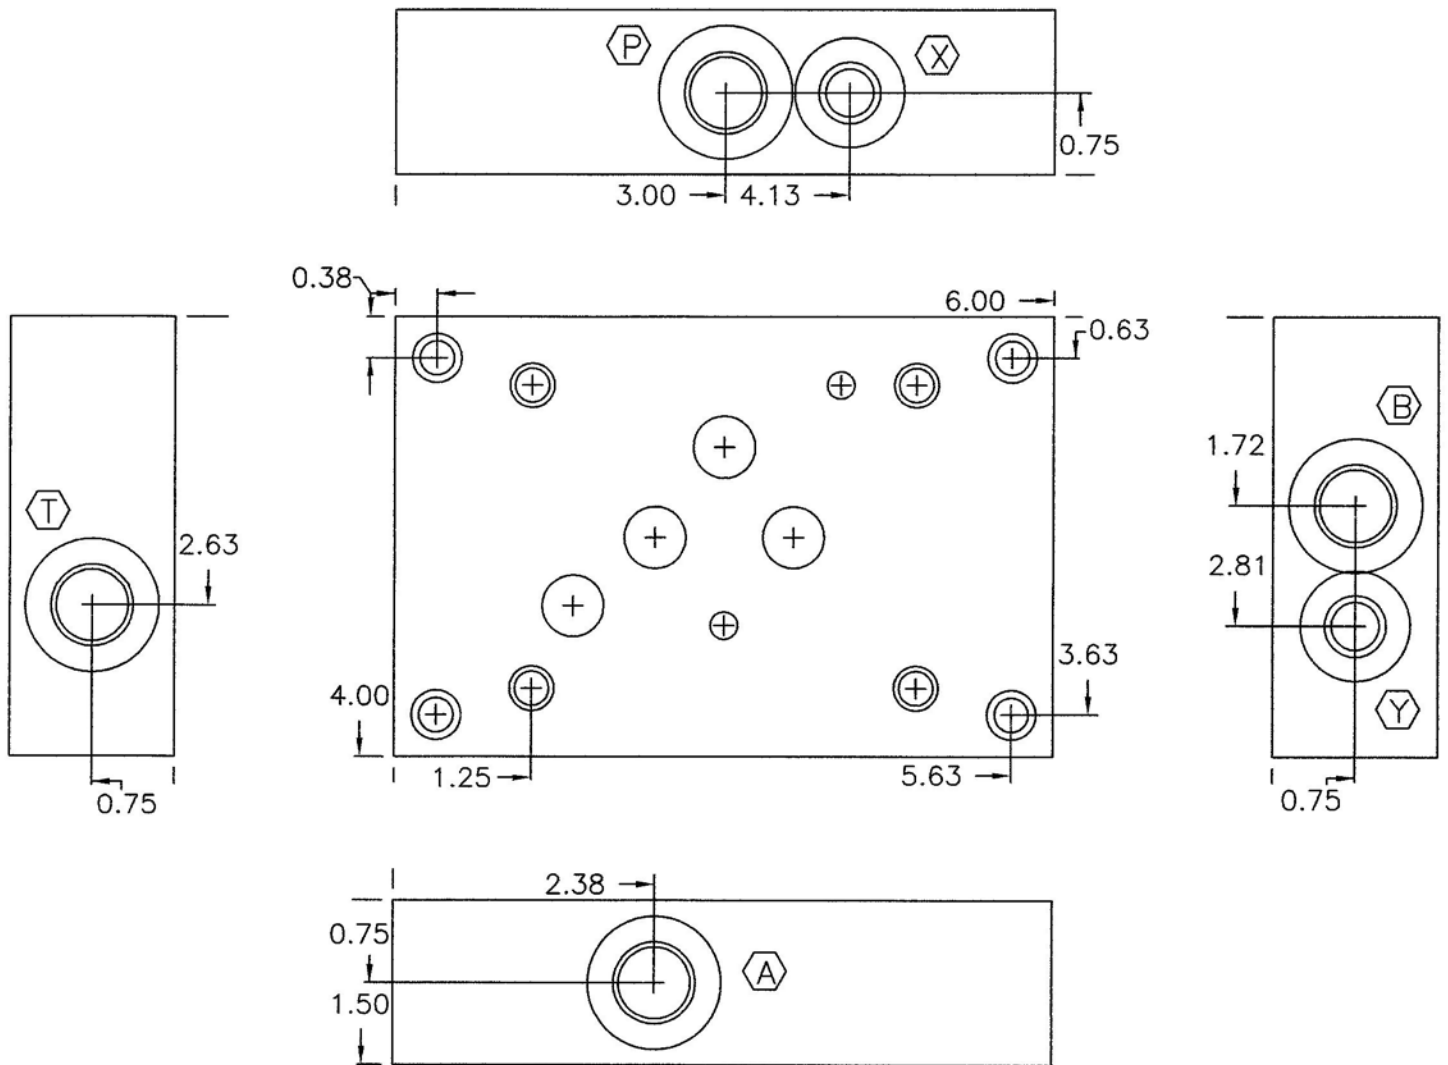

SUBPLATE MOUNTING HOLES TO
ACCOMMODATE 3/8-16
SOCKET HEAD CAP SCREWS

PORT SIZES

SAE THREAD	.750-16=8T
NPTF	.500-14=8

X&Y PORTS	
SAE THREAD	.562-18
NPTF	.250-14

D06 DESIGNATION — PART NO. B-8-* — PORT SIZE
PORT SIZE — T—SAE THREAD
OMIT FOR NPTF



MED-KAS HYDRAULICS, INC.
P.O. BOX 1163 1419 JOHN R
TROY, MI. 48099 TROY, MI. 48083
TEL: 248-585-3220 FAX # 248 585-0646
WEB SITE: www.med-kas.com E-MAIL: info@med-kas.com

SUBPLATE MATERIAL: 1018

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE